

MODEL RIOC48L-1.75




PRELIMINARY PHYSICAL DESIGN

24-OPTO INPUTS (10-50V) & 24 FORM-C RELAY OUTPUTS (30V)
 TELCO TYPE-2 I/O WITH ETHERNET, RS232 & RS485 PORTS
 LOCAL OR REMOTE STAND-ALONE "RELAY EXTENSION CORD"
 INTERNET AROUND THE WORLD COMMUNICATIONS

J1-MONITOR
RS232



12.00"

FRONT PANEL DISPLAY BOARD

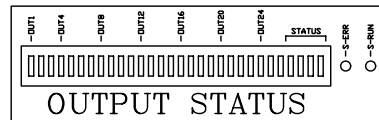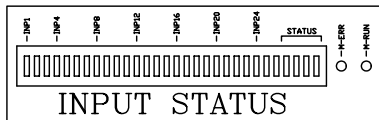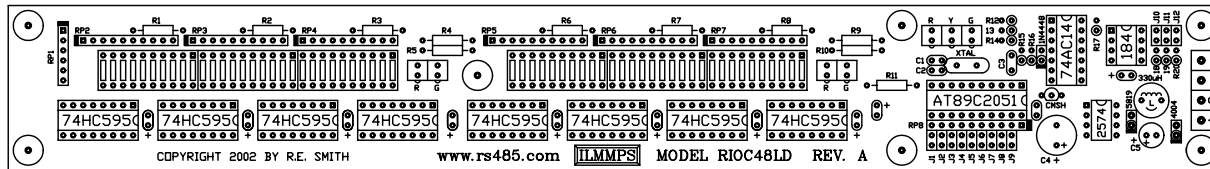

OTXD
OPWR
ORXD

ALARM



R.E. SMITH INC.


MODEL RIOC48L-1.75

wwwrs485.com

17.50"


FRONT VIEW OF ENCLOSURE

REAR VIEW OF ENCLOSURE




UNIVERSAL 90-264VAC

RESERVED FOR ENET AND
OTHER SERIAL I/O PORTS



50-PIN AMPHENOL FEMALE

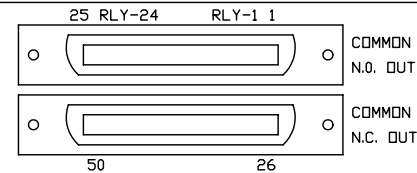

50-PIN AMPHENOL FEMALE

HALF SIZE ON "A" DRAWING

R.E. SMITH
 4311 TYLERSVILLE ROAD
 HAMILTON, OHIO 45011
 513-874-4796 www.rs485.com

This drawing is the property of R. E. SMITH and shall not be used except with the written permission of R. E. SMITH, no copies shall be made of it and all proprietary rights in the matter contained in this drawing are the property of R. E. SMITH. COPYRIGHT - R. E. SMITH, 1999	DRAWN BY RES	SUBJECT RIOC48LD-1.75
	DATE 2-23-02	FDR ENCLOSURE DWG
	SCALE NONE	
SHEET 1 OF 1	RIOC48LBOX	CHKD. BY RES
	RES	R. E. SMITH 4311 TYLERSVILLE RD. HAMILTON, OHIO 45011
		DWG. NO. RIOC48LBOX
		REV. A

